


Technical Data Sheet

ICON Soffit Vent ISV70

PRODUCT

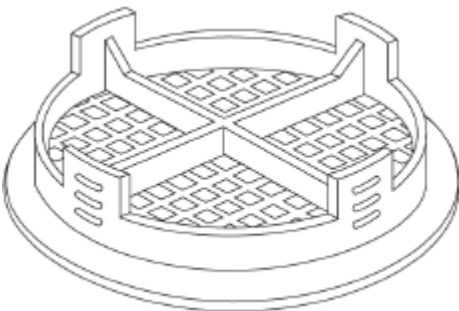

INSTALLATION

- To ventilate pitched roofs, where the pitch is 15 deg or above. Not to be used below 15 deg or on flat roof.
- Cut 70mm diameter hole in soffit board at 200mm centres. Take care to ensure the hole size is accurate and not oversized as the vent will not fix securely.
- Push fit ventilator firmly into position.
- Ventilation must be provided for the full length of the eaves and along both sides of the roof to create a cross air flow.
- The contractor installing the soffit vents must guarantee that the airpath is clear into the attic space at all time. If this cannot be guaranteed, we suggest using our refurbishment rafter trays such as IRV655.

USES


- For roof eaves ventilation
- For remedial work on existing roofs
- At eaves where 10mm continuous opening is required

FEATURES & BENEFITS

- Efficient, unobtrusive and easy to install
- Can be fitted to existing soffit
- 4mm wide holes comply with BS5250:2002
- Suits wood & plastic soffit board in any thickness
- UV stabilised and colourfast
- Installed at 200mm centres to achieve 10,000mm² continuous airflow

Product Details

Ventilation Area	2000mm ² per unit
Size	70mm Internal diameter 80mm External Diameter
Material	Injection moulded polypropylene

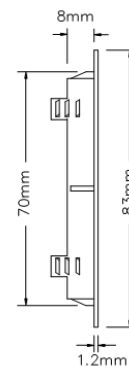

Colour	White, Brown, Black
Code	ISV70

