


# Technical Data Sheet

## 10K Slate Ventilator

### PRODUCT

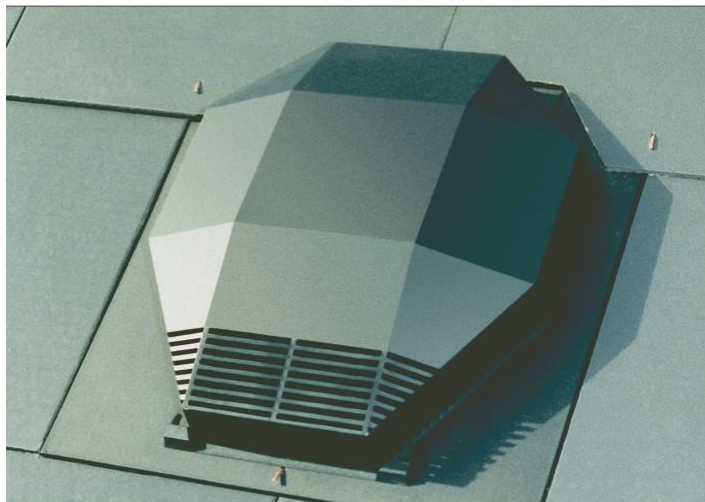

### INSTALLATION

- The 10K vent is placed into position and a hole is cut in the roofing underlay directly below the vent cap position. The two lower slates are trimmed to allow the pipe to pass through between them and centre nailed in position.
- The slate vents is positioned through the hole in the slates and centre nailed.
- If using a 500x250mm slate cut away the side sections of the slate vent shown by the guidelines on the underside.
- Continue slating up the roof as normal.



### USES

- For slate roof ventilation or soil vent pipes or mechanical extract ventilation (with accessories)
- For new build or refurbishment work
- Suitable for roof pitches between 20° and 70°
- For use at high level or low level where the roof construction does not allow eaves or ridge vents

### FEATURES & BENEFITS

- Low profile design to blend with the roof line
- Slate grey caps to suit most man-made or natural slates
- Economical general purpose cowl vent
- Can be installed as required during slating process
- Efficient, unobtrusive and easy to install
- Prevents entry of birds and large insects
- Suitable for 600x300 or 500x250mm
- Complies with current Building Regulations; BS5250 & BS5534, ICP2

### Product Details

|                  |                                |
|------------------|--------------------------------|
| <b>Free Area</b> | 10,000mm <sup>2</sup> per vent |
| <b>Size</b>      | 500x250mm & 600x300mm          |
| <b>Material</b>  | UV resistant polypropylene     |

|               |                                   |
|---------------|-----------------------------------|
| <b>Colour</b> | Slate Grey matt finish            |
| <b>Code</b>   | 10K vent—968900<br>Adaptor—979100 |

|                          |   |
|--------------------------|---|
| <b>Suggested spacing</b> | 5000mm <sup>2</sup> /m = 2.0m<br>10 000mm <sup>2</sup> /m = 1.0m<br>25 000mm <sup>2</sup> /m = 0.4m |
|--------------------------|---|

