


Technical Data Sheet

ICON COPPER RIDGE

July 2020

PRODUCT

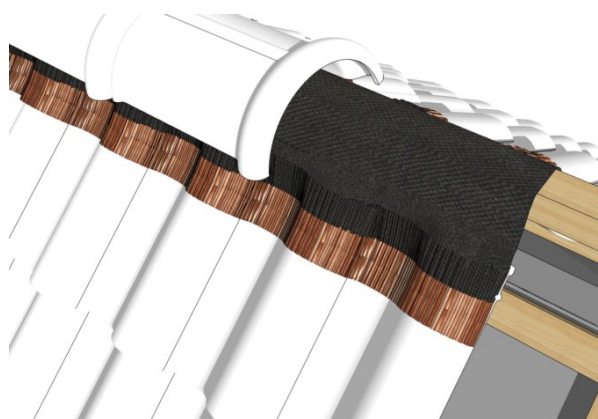

Ventilated Copper Ridge Roll
4 x 390mm rolls per box



High Quality Butyl adhesive tape adheres to any roofing finish once clean and dry



USES

- Dry fix ventilation ridge and hip roll systems for slate, concrete or clay roof coverings
- Universal solution to suit round and angled ridge tiles
- Suitable for new and retro-fit projects on roof pitches from 15-55°

FEATURES & BENEFITS

- Provides 5000mm²/m ventilation between ridge tiles on any flat or pan tile and slates
- Protects roof ridge tiles against water ingress, snow, insects and general deterioration over time
- Vapour permeable geotextile roll with two strips of pleated copper.
- UV stable providing long product life
- Various widths available to pre order
- Quick and easy to install, in most weather conditions with no special tools required
- Mechanically secure roof ridge tiles to help meet BS5534 & ICP2 code of practice for slating and tiling.
- Strong, malleable and corrosion resistant copper flashing.

Product Details

Ventilation Area	5000mm ² /m
Size	Roll size 5m x 390mm
Non stock size to special order	5m x 230mm 5m x 300mm 5m x 310mm
Material	Geotextile roll with pleated copper edge.
Colour	Copper
Code	Copper - DR51CP

