


LD Decorative Series

Axial decorative fan
with air capacity up to 310m³/h

PRODUCT

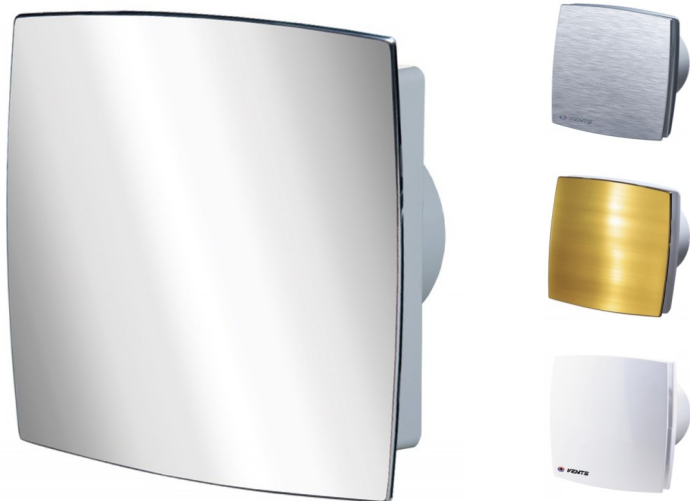

USES

- Continuous or periodic exhaust ventilation of wet rooms
- Compatible with Ø100, 125 and 150mm air ducts
- Maximum air capacity with low noise level

FEATURES & BENEFITS


- Modern design with various decorative plates options for the front panel
- Casing and impeller are made of high quality, durable ABS plastic which is UV resistant
- Protection rated IP34 and equipped with overheating protection
- Maintenance free bearings for 40,000hrs operation
- Efficient impeller design makes the fan highly efficient with a long service life

Front Panel Options





LD - Standard high quality plastic front panel
LDN - Polished Stainless Steel front panel
LDA - Ground Aluminium front panel
LDA CHROME - Mirror finish aluminium front panel
LD ALUMAT - Matt Grey painted front panel
LDA GOLD - Gold tinted aluminium front panel

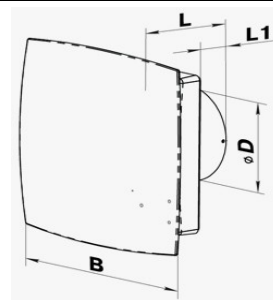DIMENSION

MODEL	Dimension (mm)				
	ØD	B	H	L	L1
LD 100	100	152	120	126	30
LD 125	125	177	140	135	34
LD 150	150	206	206	154	36



MODIFICATIONS & OPTIONS

-  **LD K** - The fan is equipped with a back draft damper for preventing back flow.
-  **LD T** - Equipped with a regulated timer with the operation time from 2 to 30 minutes.
-  **LD TH** - Equipped with timer and humidity sensor with threshold value form 60 to 90%.
-  **LD V** - Fitted with a Pull Cord switch.
- LD VT** - Equipped with Pull Cord and a regulated timer

TECHNICAL DATA

MODEL	Voltage (V) at 50 Hz	Power Consumption (W)	Current (A)	Maximum air capacity (m ³ /h)	Sound Pressure Level at 3m (dB(A))	Weight (kg)
LD 100	220-240	14	0.085	88	33	0.60
LD 125	220-240	16	0.10	167	34	0.74
LD 150	220-240	24	0.13	265	37	0.96



IP 45



Unit 3 Broomhill Terrace, Broomhill Road, Tallaght, Dublin 24

Tel: 01 401 9728 • Fax: 01 401 9739 • Email: info@iconbp.ie • www.iconbp.ie